



Non e' permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Touta Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.


Weitergabe sowie Vervielfältigung dieser Unterlagen, Vervielfältigung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

S.NO	MATERIAL	SURFACE PROTECTION
I	ALUMINIUM ALLOY	BALL BURNISH BRIGHT
II	NBR	NO TREATMENT
III	STEEL	ZINC PLATING
IV	STEEL	BLACK E-COAT
V	HDPE	NO TREATMENT
VI	340 SST MESH	NO TREATMENT

⚡ SAFETY CHARACTERISTICS	0
⚡ SIGNIFICANT CHARACTERISTICS	0
⚡ CUSTOMER INTERFACE	0

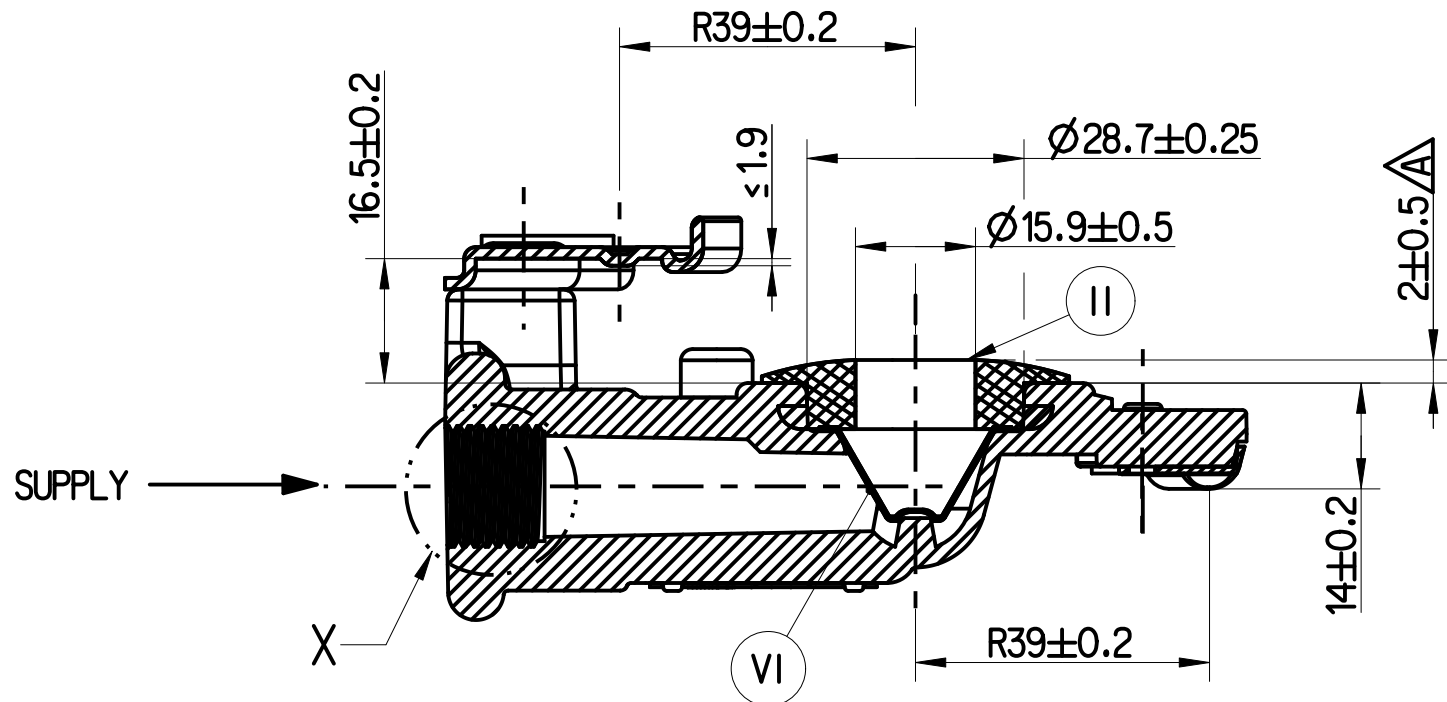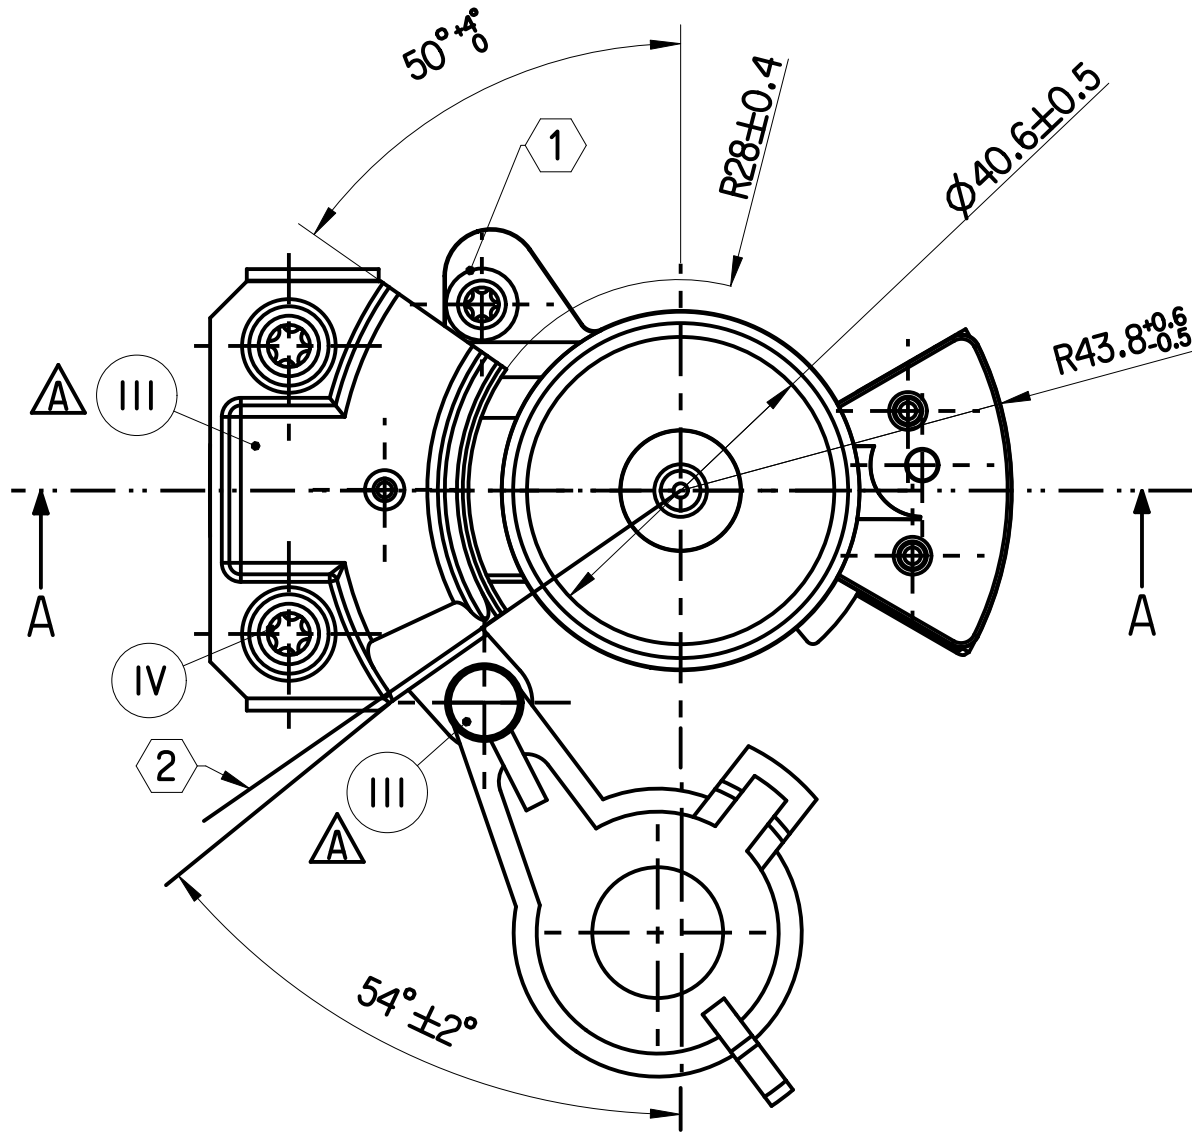

SECTION A-A

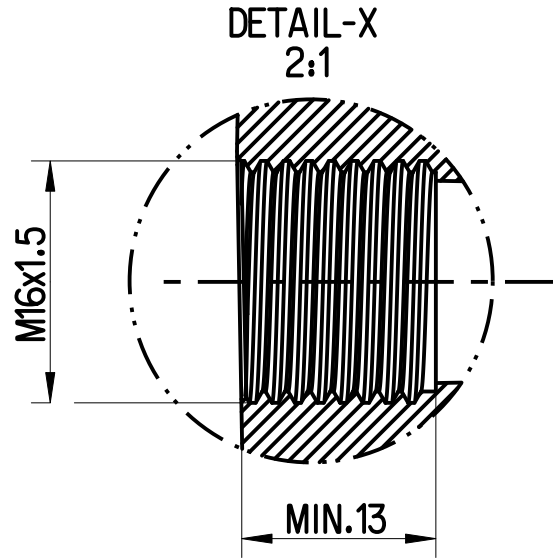

NOTES

- 1 POKA-YOKE
- 2 STOP
- 3 LID COLOUR-YELLOW
LID MUST BE CLOSED WHEN NOT IN USE
- 4 DIRECTION OF LID ROTATION
- 5 PART NUMBER AND DATE OF MANUFACTURE
ARE SHOWN HERE.

S.No	NOTES	
1	WORKING MEDIUM	COMPRESSED AIR
2	WORKING TEMPERATURE	-40° C TO +70° C
3	MAXIMUM INLET PRESSURE	8.5 bar
4	RECOMMENDED INSTALLATION TORQUE	31±3 Nm (CUSTOMER TO ENSURE THE TORQUE)
5	TRACTOR AND TRAILER COUPLING FLOW DIAMETER IS EQUIVALANT AND MIN. FLOW PASSAGE	103mm ² (Ø11.4 mm)
6	CIRCUIT DIAGRAM SYMBOL	ISO 1219
7	PART PRESSURE TIGHT UPTO	10 bar
8	YELLOW COLOR COUPLING FOR CONTROL SIDE	

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP		Copyright ZF®		ProVia COUPLING HEAD TRAILER CONTROL			
Further Technical Data: PRO 200 000 0		Date	Signature				
Doc. Code: 035 Sheet: 1 To 9		2024-04-17	Drawn Kaviya				
General Tolerances JED-261		2024-04-23	Checked Saranwan				
Range of Nominal Dimensions (± mm)		Dimensions in mm		Material No.			
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	±	±3°
Fine		±0.5	±1	±1.5	±2		
Medium	X	±1	±2	±3	±4		
Coarse		±2	±3.5	±5	±6.5		
Tapped Holes acc. -		Mass	Scale	Date of first issue: 2023-11-09		Doc.Code Language Sheet	
1) Tolerance Class Applied Crossmarked		0.178 kg	NTS	PRO 200 001 0		005	EN 1/1
		Size	CAD System	ECN-No.	Revision	Techn. Resp.	Replacement for
		A 2	CREO	515896	7x A	5710_AM	-

